



WP-3 WetPak

Stationary Horizontal Compactor

Specifications


Manufacturer's Rated Size	3 Cubic Yards
Rated Size	2.46 Cubic Yards
Cycle Time	54 Seconds
Capacity Per Hour	164 Yards
Clear Top Opening (L x W)	52 1/2" x 62"
Ram Face Dimensions (W x H)	59 3/4" x 24"
Ram Penetration	24"
Cylinder Bore, Rod & Stroke	6" x 4 1/2" x 92"
Operating Pressure	
Normal	1500 PSI
Maximum	2000 PSI
Ram Force Rating	
Normal	29.58 PSI / 42,412 Lbs
Maximum	39.43 PSI / 56,549 Lbs
Motor (HP)	20 HP
Pump (GPM)	18 GPM
Tank Capacity	60 Gallons
Shipping Weight	9,025 Lbs (approx)

Construction

Frame	
Floor – AR Plate	1/2"
Floor Plate Supports	4" – 5.4 Lb Channel
Side Plates	3/8"
Side Reinforcements	6" x 3" x 1/4" Tube
Breaker Bar	6" x 3" x 3/8" Tube
Ram Hold Down Bars	1 1/4" x 1 1/4" Bar
Load Binder Hook-Up	126,000 Lbs Capacity
Ram	
Face Plate	3/4"
Floor – AR Plate	1/2"
Side Plates	3/4"
Top Plate	3/8"
Top Plate Reinforcement	4" – 5.4 Lb Channel

All Specifications are subject to change without notice

Installation Requirements

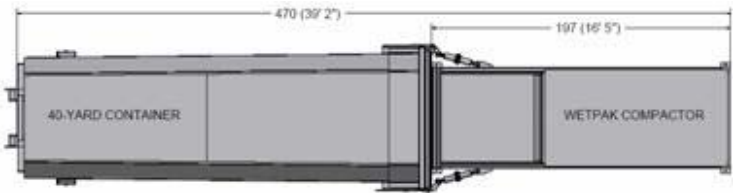

Minimum Recommended Requirements:

- Concrete Pad: 10' x 40' (May be made larger to suit)
4,000 PSI Reinforced, 6" Thick
- (4) 3/4" x 4 3/4" Anchor Bolts

Minimum Clearance Requirements:

- 12" From Back of Compactor to Wall
- 36" From Right & Left of Compactor to Wall

Electrical Disconnect Requirements

20 HP Motor		
Voltage	Amperage	Fuse
208	100	80
240	100	70
480	60	40

Available Options

- Hoppers & Enclosures – Any Configuration
- Through – Wall Chute & Door Framework
- Standard & Full Container Guides
- Pre-Crusher
- Compactor Access Systems
- Drive-On Ramp
- Cart Dumper
- Wheel Wear Plates
- Oil Heater

All Compactors can be customized to Accommodate Any Clear Top Opening

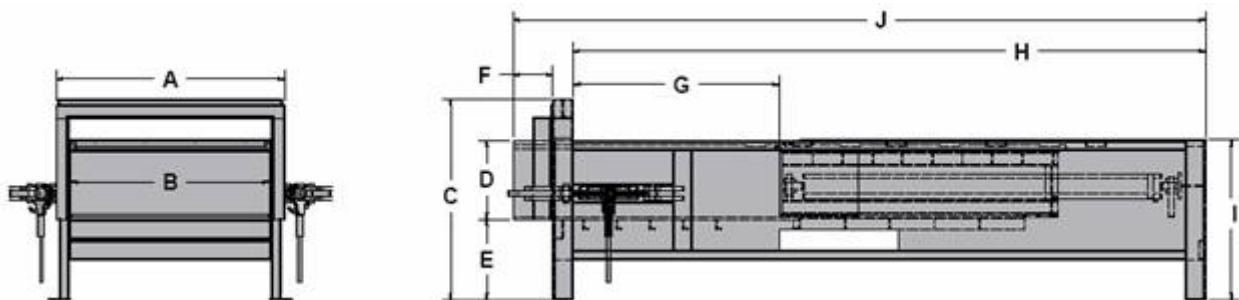


Illustration for reference

A	B	C	D	E	F	G	H	I	J	Capacity
68 3/4"	60"	60 1/2"	23 3/4"	24 1/4"	12"	62"	190 1/2"	48"	208 1/2"	3 Yards